



Quality You Can Believe In!



AVENGER SERIES

S SERIES

UAK SERIES

OIL-MINDER

CONTROLS

ACCESSORIES

UAK Series - Wastewater Pumps

Free Standing Installation:

The majority of wastewater pumps are installed in chambers constructed from pre-fabricated concrete rings. The basic portable design (P) can be fitted with flexible hose to a high level outlet or quick-release coupling or fixed pipework.



Guide Rail System:



Guide Rail (GR) installation is by far the most popular method of fixing sewage pumps. A duck-foot discharge bend with special quick-release low level coupling is bolted to the floor of the chamber and the pump is lowered into position on two rails.



new!

Avenger SSD 200 2 HP dewatering pump for utility vaults, mining, construction and other applications

General & Electrical Specifications:

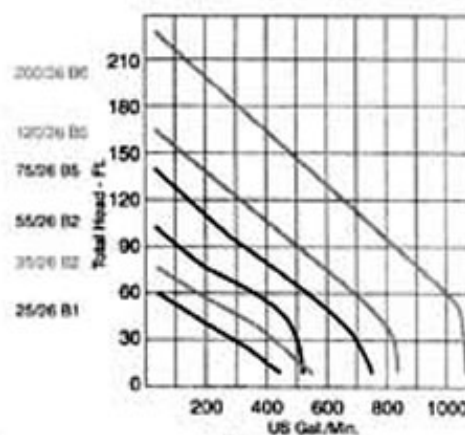
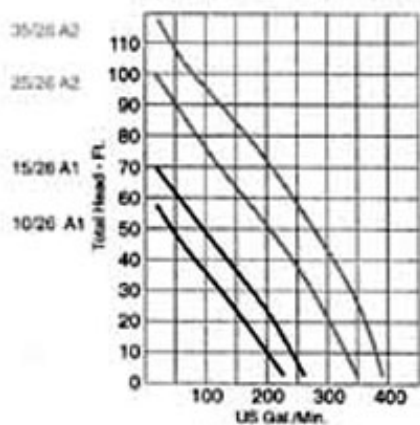


Type	HP	Voltage	Discharge Size (in.)	Suction Size (in.)	Max. Current Amps	SPHr	Net Weight
UAK 10/20 A1	2.2	220/440	2	1.75	73.8	340	81.2
UAK 15/20 A1	2.5	220/440	2	1.75	64	340	81.2
UAK 25/20 A2	4.5	220/440	2	1.75	14.5/7.3	340	98
UAK 35/20 A2	8.5	220/440	2	1.75	14/7	340	109

Type	HP	Voltage	Discharge Size (in.)	Suction Size (in.)	Max. Current Amps	SPHr	Net Weight
UAK 25/20 B1	4.7	220/440	3	2.75	13.6/6.8	3400	99
UAK 35/20 B2	5.3	220/440	3	2.75	13.8/6.9	3400	101
UAK 55/20 B2	9	220/440	3	2.75	21.6/11.8	3400	142
UAK 75/20 B5	18.8	480	3	2.75	22.8	3400	215
UAK 120/20 B5	18.8	480	3	2.75	22.8	3400	440
UAK 200/20 B5	25.5	480	4	2.75	28	3400	570



Avenger SS Series
Constructed of 316 stainless steel. Models up to 7.5 H.P.

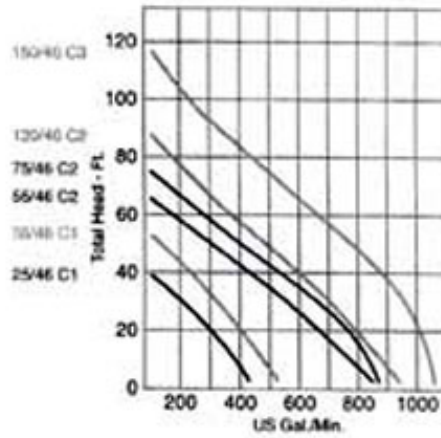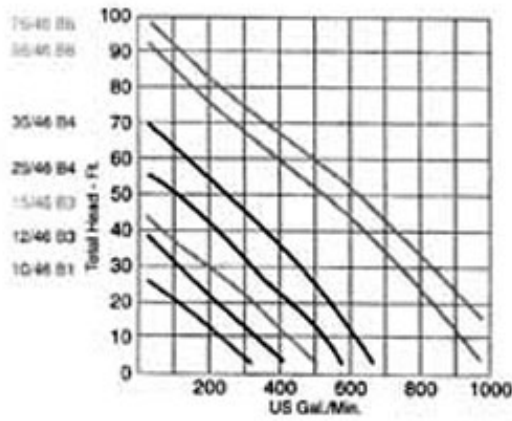

Type	HP	Voltage	Discharge Size (in.)	Suction Size (in.)	Max. Current Amps	RPM	Net Weight
UAK 10/46 B1	1.3	230/460	3	3	4.2/7.1	1700	88
UAK 12/46 B3	1.8	230/460	3	3	5.1/8.9	1700	103
UAK 15/46 B3	2.6	230/460	3	3	8.6/13.3	1700	168
UAK 25/46 B4	4.5	230/460	3	3	14.4/21.3	1700	329
UAK 35/46 B4	8.3	230/460	3	3	21.6/38.4	1700	576
UAK 55/46 B6	16.75	460	4	3	21.8	1700	402
UAK 75/46 B5	16.75	460	4	3	21.8	1700	418
Type	HP	Voltage	Discharge Size (in.)	Suction Size (in.)	Max. Current Amps	RPM	Net Weight
UAK 25/46 C1	4.4	230/460	4	4	14.7	1700	176
UAK 35/46 C2	8.3	230/460	4	4	24.9/39.8	1700	387
UAK 55/46 C2	16.75	460	4	4	21.8	1700	401
UAK 75/46 C2	16.75	460	4	4	21.8	1700	461
UAK 130/46 C3	16.75	460	6	4	21.8	1700	519
UAK 150/46 C3	29.3	460	6	4	18	1700	628

[HOME](#) | [PUMPS](#) | [CONTROLS](#) | [ACCESSORIES](#) | [ENVIRONMENTAL](#) | [CONTACT](#) | [LINKS](#)

STANCOR, Inc., 515 Fan Hill Rd., Monroe, CT 06468

Phone: (203) 268-7513

Fax: (203)268-7958

stancor@stancorpumps.com

© Copyright 2004 Stancor, Inc. All Rights Reserved.